



An ISO 9001 / 27001
Certified company

UL-WOD Series

WOD-62DDC-UL50



Why Choose The UL-WOD Series?

The UL-WOD series of enclosures are the ultimate choice for your outdoor racking requirements. Being made of our own rugged Alumiflex®, you'll find it noticeably lighter than steel, yet strong enough to rack even the heaviest equipment. When choosing the UL-WOD series, you have handpicked the highest value in American construction. The UL-WOD series includes the standard features you have come to expect with DDB, incorporating the versatile strut system for adjustable racking, the security of a 3- point locking system and our patented Alumishield® solar cap to manage heat loads. For those who need more than just our standard enclosure, DDB can also make a truly customized solution with our many available options including HVAC, providing a climate-controlled environment for any electronic equipment, electrical load panels and cable entry solutions to name a few. All of this comes together to create an enclosure able to meet all of the unique needs your customers have been seeking. DDB offers a state-of-the-art design, a competitive price, benchmark lead times and a guaranteed delivery, all backed up with an industry leading 15-year warranty on every enclosure. Put DDB's substantial stock to work for you today. Contact our professional staff to assist you with your made-to-order solution.



Features

- 0.125" Aluminum Construction
- Stainless Steel External Hardware/Hinge
- Fully Welded Construction
- 3 Point Lock System
- Front and Rear Access
- Custom Colors Available
- Quick Lead Time
- Flexible and Scalable
- 15 Year Warranty
- Quick Shipping

Application Types

- Telecommunications
- Wireless/Broadband
- Fiber Optics
- Back Haul
- Small Cell/DAS
- Public Safety
- Utility
- Base Station
- Military
- Trailer-Based Communications
- Wi-Fi
- LTEE/4G/5G



Industry Standards:

WOD Series Listed to UL 50/50E Type 4
ETL listed to UL Standard 60950-1/CSA 22.2C

2301 S. HWY 77 Pauls Valley, OK 73075
T: (800) 753-8459 – F: (877) 220-7236

sales@ddbunlimited.com www.ddbunlimited.com

Weight and Dimensions

Approximate Exterior Enclosure Dimensions:

62"H x 32"W x 39"D

Shipping Dimensions:

42"W x 40"L - Palletized

Approximate Shipping Weight:

242 lbs.

UL-WOD Series

WOD-62DDC-UL50



Features

1. Solar Shield (Alumishield)
2. 2 Sets of 19" Adjustable Racking Rails
3. 33 Racking Units
4. Rear Access Door
5. 3 Point Locking System
6. Ground Strap - UL Listed
7. Frame Gasket - UL Listed


2301 S. HWY 77 Pauls Valley, OK 73075

T: (800) 753-8459 – F: (877) 220-7236


sales@ddbunlimited.com www.ddbunlimited.com

WEB DRAWING (NOT FOR FABRICATION)

REVISIONS		
REV.	DESCRIPTION	DATE
A	CREATED DRAWING PER DR-02059	7/17/2019

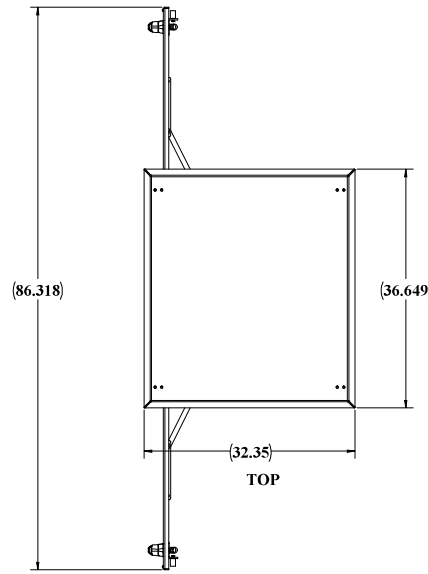


STANDOFFS ARE STANDARD FOR OPTIONAL LIGHTING OVER EACH DOOR FRONT AND REAR

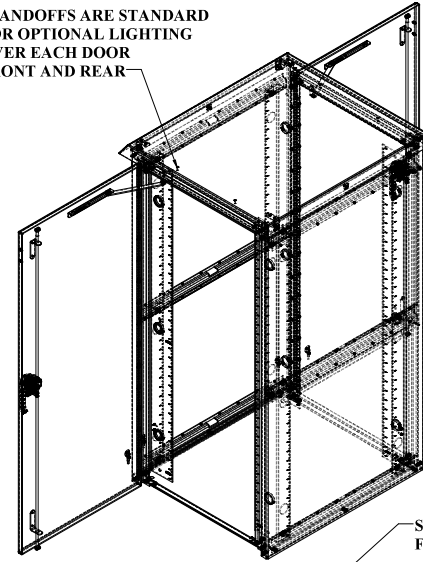


STANDARD WINDLOCKS FOR EACH DOOR

FRONT SET OF RAILS ARE STANDARD
NO CEILING LOUVERS
OPTIONAL REAR SET OF RAILS

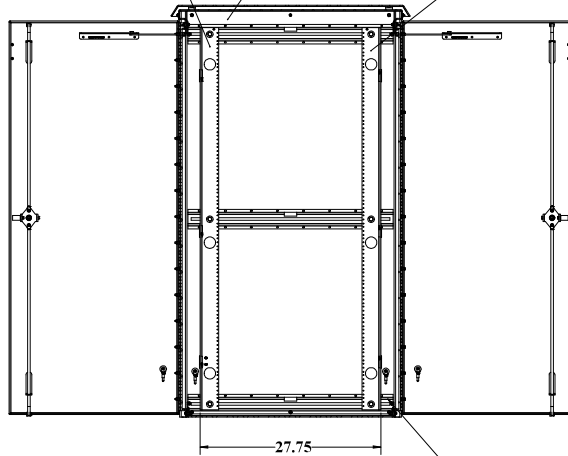

SECTION A-A
SCALE 1:9


R-STRUTS FOR RAIL ADJUSTMENTS

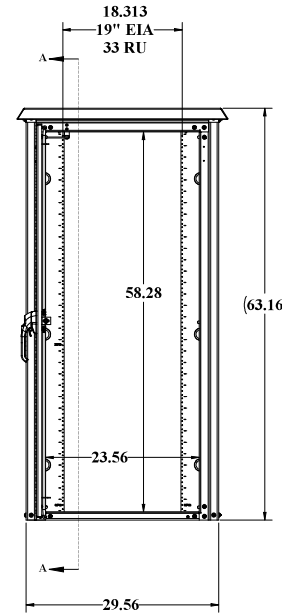

FRONT

3 POINT LOCKING EACH DOOR

NO FILTERED LOUVERS

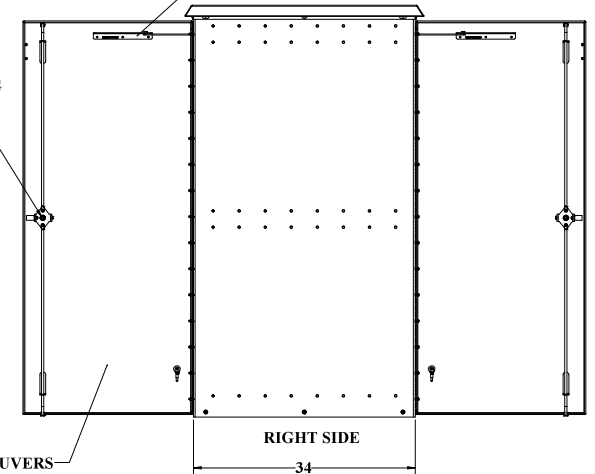

RIGHT SIDE


WEB DRAWING (NOT FOR FABRICATION)

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	DDB Unlimited Inc.			
COMPONENTS ARE OF STEEL	Model No.	0208	7/17/2019	WOB-XXXX-41L50			
APPLICABLE STANDARDS	Drawn By	Chris E.	7/17/2019	WOB, GCH, DD-IL50			
ASME Y29.18-2014	Sales Rep.			SHE	Cage Code:	DWG. NO.:	REV
ANSI Z39.18-2012	Q.A. Appr.	Mary	07/18/19	D	88515	02059	A
ASME Y14.100-2018	Prod. Mgr.	Chris E.	07/18/19	SCALE: 1:12 WOB-HF-203 lbs.			
ASME Y14.101-2013	Created By:			SHEET 1 OF 3			
ASME Y14.102-2018	Checked By:						
ASME Y14.103-2017							
ASME Y14.104-2013							
ASME Y14.105-2012							
ASME Y14.106-2012							
ASME Y14.107-2012							
ASME Y14.108-2012							
ASME Y14.109-2012							
ASME Y14.110-2012							
ASME Y14.111-2012							
ASME Y14.112-2012							
ASME Y14.113-2012							
ASME Y14.114-2012							
ASME Y14.115-2012							
ASME Y14.116-2012							
ASME Y14.117-2012							
ASME Y14.118-2012							
ASME Y14.119-2012							
ASME Y14.120-2012							
ASME Y14.121-2012							
ASME Y14.122-2012							
ASME Y14.123-2012							
ASME Y14.124-2012							
ASME Y14.125-2012							
ASME Y14.126-2012							
ASME Y14.127-2012							
ASME Y14.128-2012							
ASME Y14.129-2012							
ASME Y14.130-2012							
ASME Y14.131-2012							
ASME Y14.132-2012							
ASME Y14.133-2012							
ASME Y14.134-2012							
ASME Y14.135-2012							
ASME Y14.136-2012							
ASME Y14.137-2012							
ASME Y14.138-2012							
ASME Y14.139-2012							
ASME Y14.140-2012							
ASME Y14.141-2012							
ASME Y14.142-2012							
ASME Y14.143-2012							
ASME Y14.144-2012							
ASME Y14.145-2012							
ASME Y14.146-2012							
ASME Y14.147-2012							
ASME Y14.148-2012							
ASME Y14.149-2012							
ASME Y14.150-2012							
ASME Y14.151-2012							
ASME Y14.152-2012							
ASME Y14.153-2012							
ASME Y14.154-2012							
ASME Y14.155-2012							
ASME Y14.156-2012							
ASME Y14.157-2012							
ASME Y14.158-2012							
ASME Y14.159-2012							
ASME Y14.160-2012							
ASME Y14.161-2012							
ASME Y14.162-2012							
ASME Y14.163-2012							
ASME Y14.164-2012							
ASME Y14.165-2012							
ASME Y14.166-2012							
ASME Y14.167-2012							
ASME Y14.168-2012							
ASME Y14.169-2012							
ASME Y14.170-2012							
ASME Y14.171-2012							
ASME Y14.172-2012							
ASME Y14.173-2012							
ASME Y14.174-2012							
ASME Y14.175-2012							
ASME Y14.176-2012							
ASME Y14.177-2012							
ASME Y14.178-2012							
ASME Y14.179-2012							
ASME Y14.180-2012							
ASME Y14.181-2012							
ASME Y14.182-2012							
ASME Y14.183-2012							
ASME Y14.184-2012							
ASME Y14.185-2012							
ASME Y14.186-2012							
ASME Y14.187-2012							
ASME Y14.188-2012							
ASME Y14.189-2012							
ASME Y14.190-2012							
ASME Y14.191-2012							
ASME Y14.192-2012							
ASME Y14.193-2012							
ASME Y14.194-2012							
ASME Y14.195-2012							
ASME Y14.196-2012							
ASME Y14.197-2012							
ASME Y14.198-2012							
ASME Y14.199-2012							
ASME Y14.200-2012							

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DDB Unlimited, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DDB Unlimited, INC. IS PROHIBITED.

DDB FORM 7.1-2 REV. 05/02/19

WEB DRAWING (NOT FOR FABRICATION)

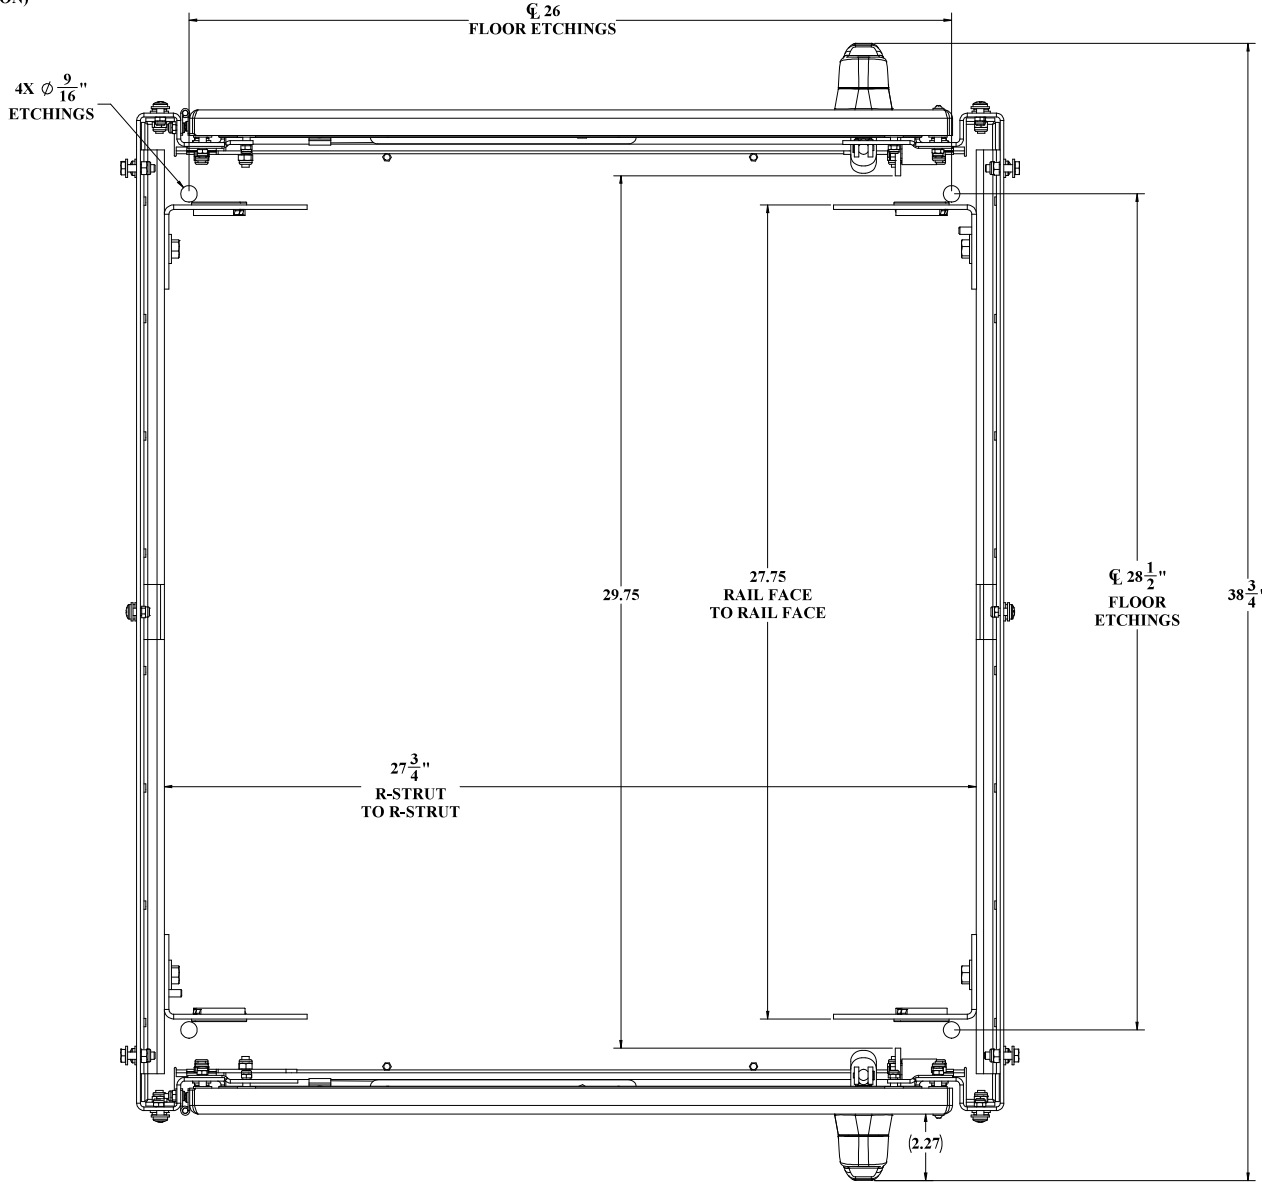


TOP VIEW
NO CEILING OR ALUMASHIELD SHOWN

WEB DRAWING (NOT FOR FABRICATION)

UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN INCHES		INCHES TO NEAREST 1/16"	
DIMENSIONS IN PARENTHESES ARE FOR INFORMATION ONLY		DIMENSIONS TO NEAREST 1/8"	
DIMENSIONS IN BRACKETS ARE FOR INFORMATION ONLY		DIMENSIONS TO NEAREST 1/8"	
ALL DIMENSIONS PER DWG.			
MATERIAL SPECIFICATIONS AND ATTACHMENTS			
PAINT: GALVANNEAL, BLACK OXIDATION RESISTANT			
DO NOT SCALE DRAWING			
DDB Unlimited Inc.			
6C-UL50F-CLOSED			
W.O.D. CLOSED, DD UL50			
REV	Code Code:	DWG. NO.:	REV
D	28515	02059	A
SCALE: 1:12		WEIGHT:	SHEET 2 OF 3

DDB FORM 7.1-2 REV. A (08/02/17)

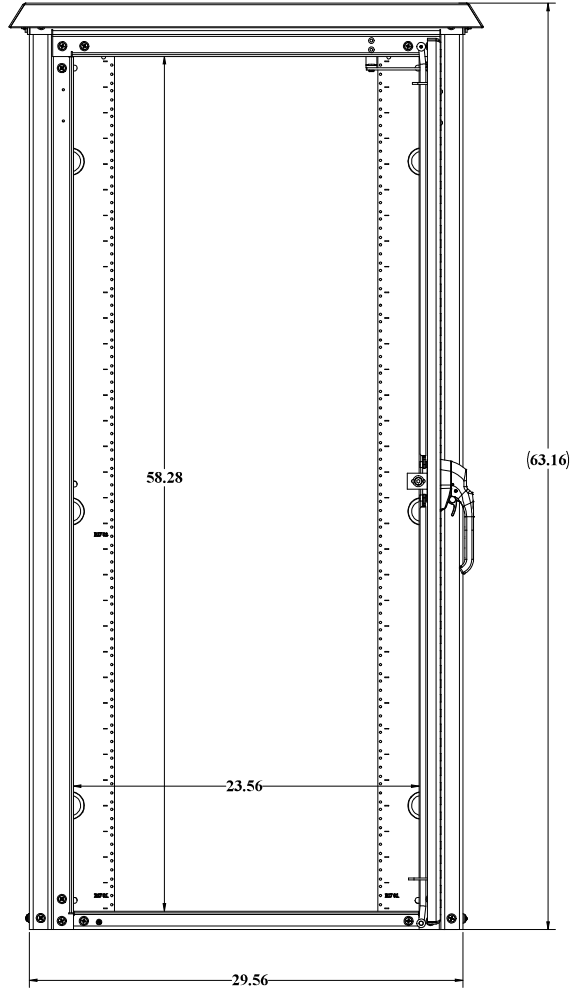

**BACK VIEW
GASKET NOT SHOWN**

UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN INCHES			
FINISH	1" FIN		
DRILLING	NO SPECIAL		
DRILL SIZE	AS SHOWN		
DRILL DEPTH	1/8" MIN		
DRILL EDGE	NO CHAMFER		
ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE SPECIFIED			
MATERIALS SPECIFIED BY LETTERS IN PARENTHESIS			
PAINT: ROOMS VARY, SEE 02059 FOR DETAILS			
DO NOT SCALE DRAWING			
DDB Unlimited Inc.		WOD-4204-UL50	
WOD-42" UL DRL UL50			
REV	Code Code:	DWG. NO.:	REV
D	28515	02059	A
SCALE 1:12		WEIGHT:	SHEET 2 OF 3

DDB UNLIMITED INC. AND ITS AFFILIATES ARE NOT RESPONSIBLE FOR THE INFORMATION CONTAINED IN THIS DRAWING AS THE SOLE PROPERTY OF DDB UNLIMITED INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DDB UNLIMITED INC. IS PROHIBITED.