

UL-50 OD SERIES

OD-62DDC-UL50

Why Choose the OD-UL Series?

The OD-62DDC-UL50 enclosures are the ultimate choice for your outdoor racking requirements. Being made of our own rugged Alumiflex®, you'll find it noticeably lighter than steel, yet strong enough to rack even the heaviest equipment. When choosing the OD-UL series, you have handpicked the highest value in American construction. The OD-UL series includes the standard features you have come to expect with DDB, incorporating the versatile R-strut system for adjustable racking, the security of a 3-point locking system, our patented Alumishield® solar cap to manage heat loads, door grounding strap, & UL listed gasketing. For those who need more than just our standard enclosure, DDB can also make a truly customized solution with our many available options including HVAC, providing a climate-controlled environment for any electronic equipment, electrical load panels and cable entry solutions to name a few. All of this comes together to create an enclosure able to meet all of the unique needs your customers have been seeking. DDB offers a state-of-the-art design, a competitive price, benchmark lead times and a guaranteed delivery, all backed up with an industry leading 15-year warranty on every enclosure. Put DDB's substantial stock to work for you today. Contact our professional staff to assist you with your made-to-order solution.

Application Types

- Telecommunications
- Wireless/Broadband
 - Fiber Optics
 - Back Haul
 - Base Station
- Small Cell/ DAS
- Utility
- Public Safety
- Military
- Trailer-Based
- Communications
 - Wi-Fi
- Flexible and Scalable
 - LTEE/4G/5G
- Intelligent Traffic



Environmental & Safety Ratings:

- ✓ ETL environmentally listed to UL 50/50E, IP 66, Type 4
- ✓ ETL listed; Safety Requirements, UL 62368-1:2019 Ed.3, CSA C22.2



Features

- 15 Year Warranty
- 0.125" Aluminum Construction
- Welded Construction
- 3-Point Locking System
- Front and Rear Access
- Stainless Steel External Hardware/Hinge
- Custom Colors Available
- Water/Rain/Sleet/Dust Tight
- Flexible and Scalable
- Quick Shipping

Weight and Dimensions

- Approximate Exterior Enclosure Dimensions:
 - 64"H x 29"W x 39"D
- Shipping Dimensions:
 - 42"L x 32"W x 72"H- Palletized
- Approximate Shipping Weight:
 - 216 lbs.

UL-50 OD SERIES

OD-62DDC-UL50



Features

1. Alumishield Solar Cap
2. 19" Adjustable Racking Rails
3. Stainless Steel Door Hinge
4. Door Grounding Strap
5. 3-Point Locking System
6. 0.125" Aluminum Construction
7. Rear Door Access
8. Powder Coat Finish

2301 S. HWY 77 Pauls Valley, OK 73075


T: (405)-665-2876

sales@ddbunlimited.com www.ddbunlimited.com


Scan this code for
Climate Control




Scan this code for
Accessories



TGXHQPU		
TGX0	FGUETRRVQIP	FCVG
C	ETGCVGF'Y GDUS'G'FTCY #P1 'HQT'QF/84FF/ VN72'RGT'FT/23:75	327H23:
D	WRF CVGF'UI GGV'HQTO CV	5E2H244

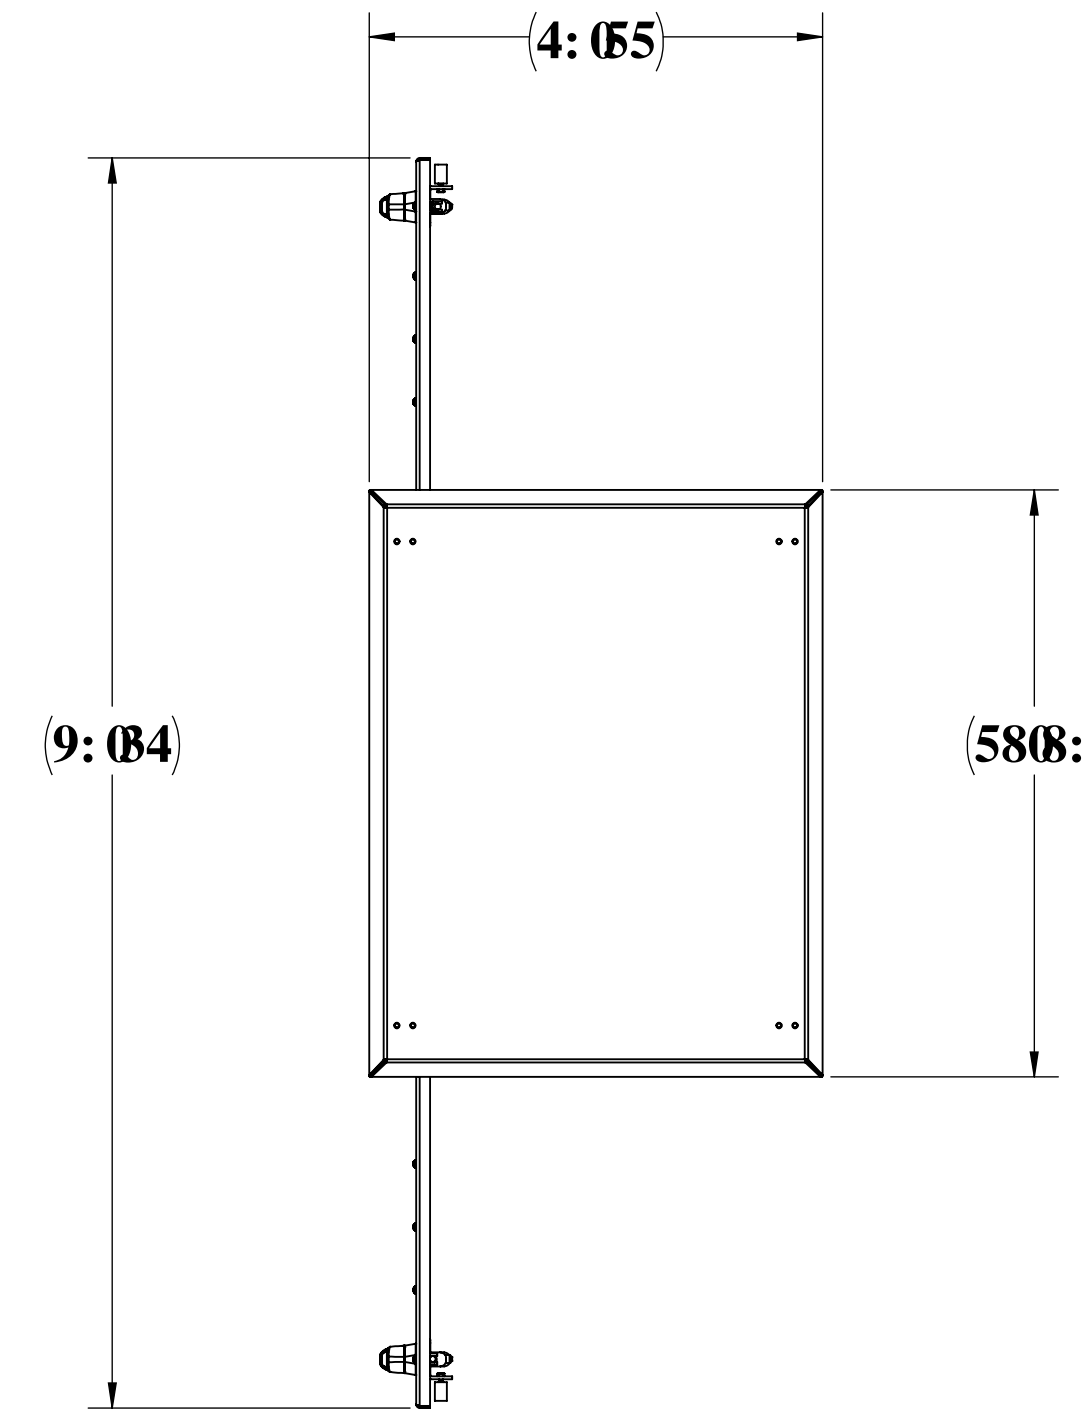

UVC PF QHHU'UVC PF CTF
HQT'QRVQIP CN'NH J VRPI
QXGT'GCEJ 'FQQT

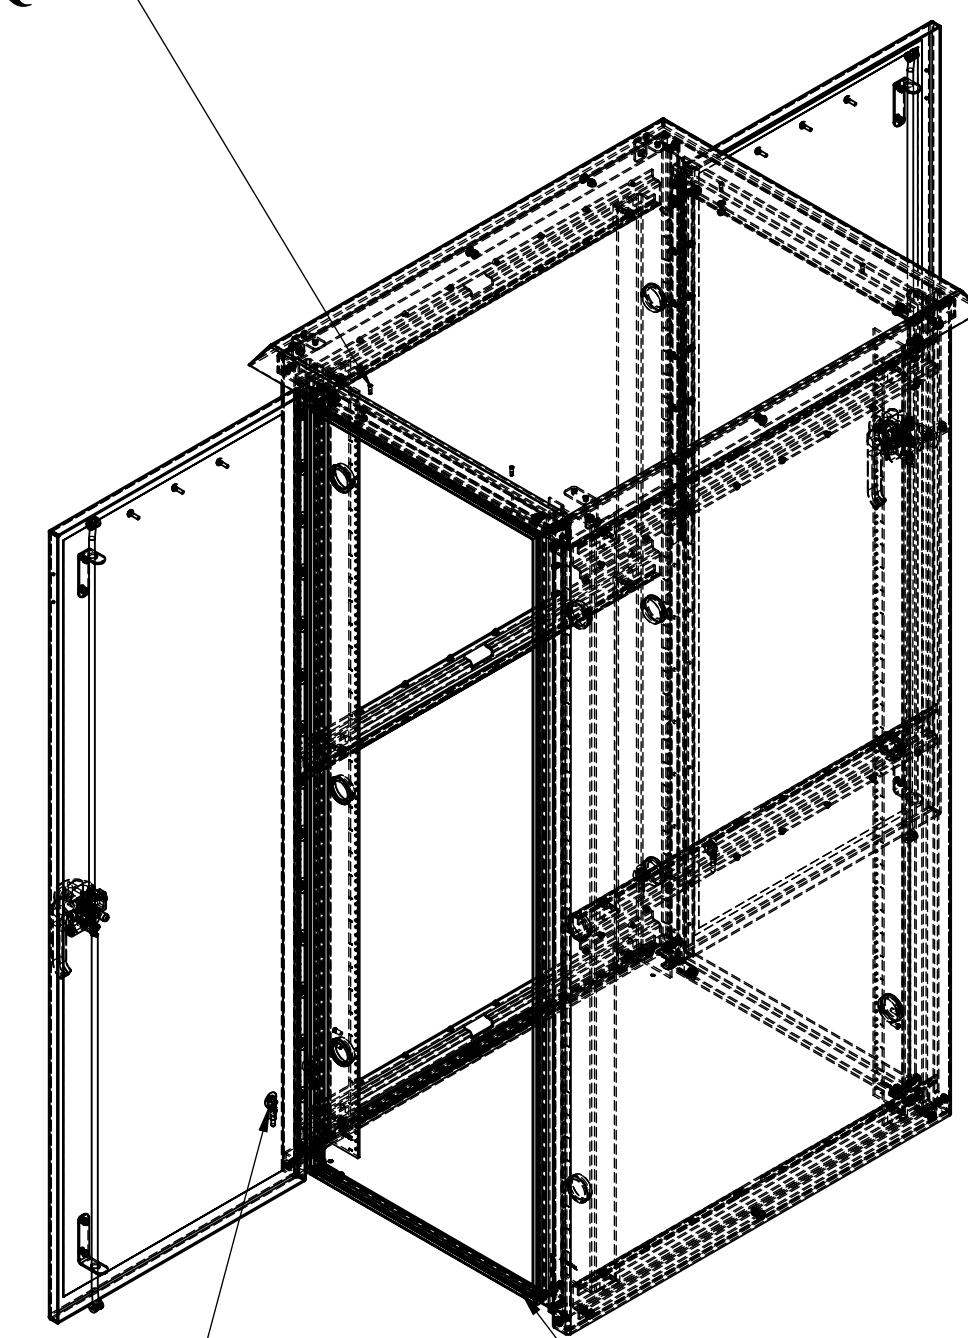


6Z'I TQWPFPI 'UVWFU

CNN'UGCO UY GNF GF


H'QP V'CPF 'TGCT'TCKNU'
UVC PF CTF

H'QP V'CPF 'TGCT'TCKNU'
UVC PF CTF

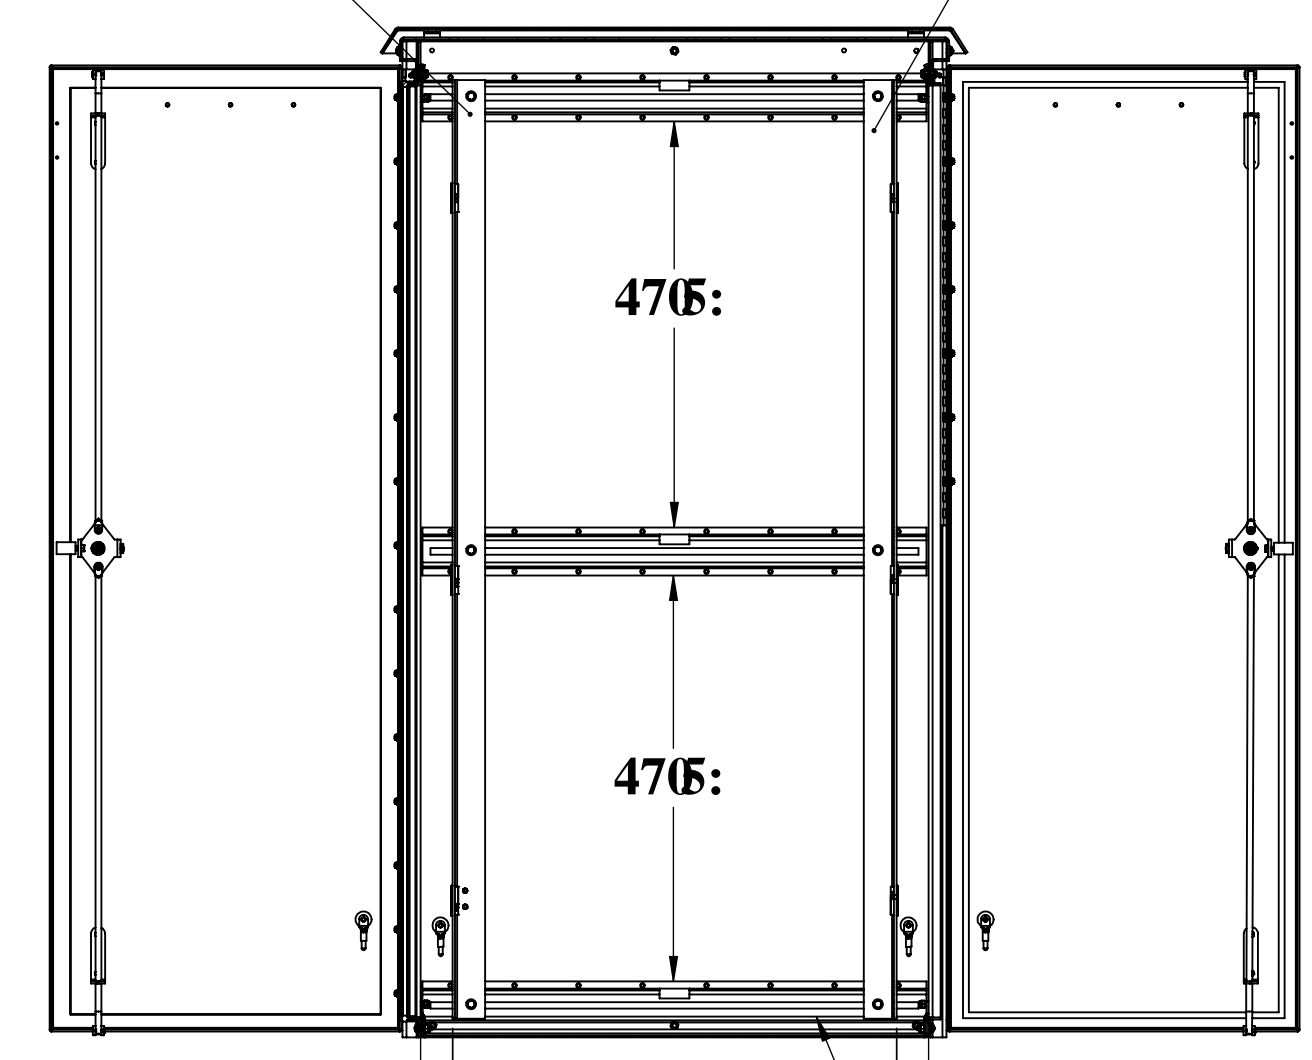


4 4907 4
UGEVIQP'C/C

T/UVTW
HQT'TCKN'CF LWUVO GP VU

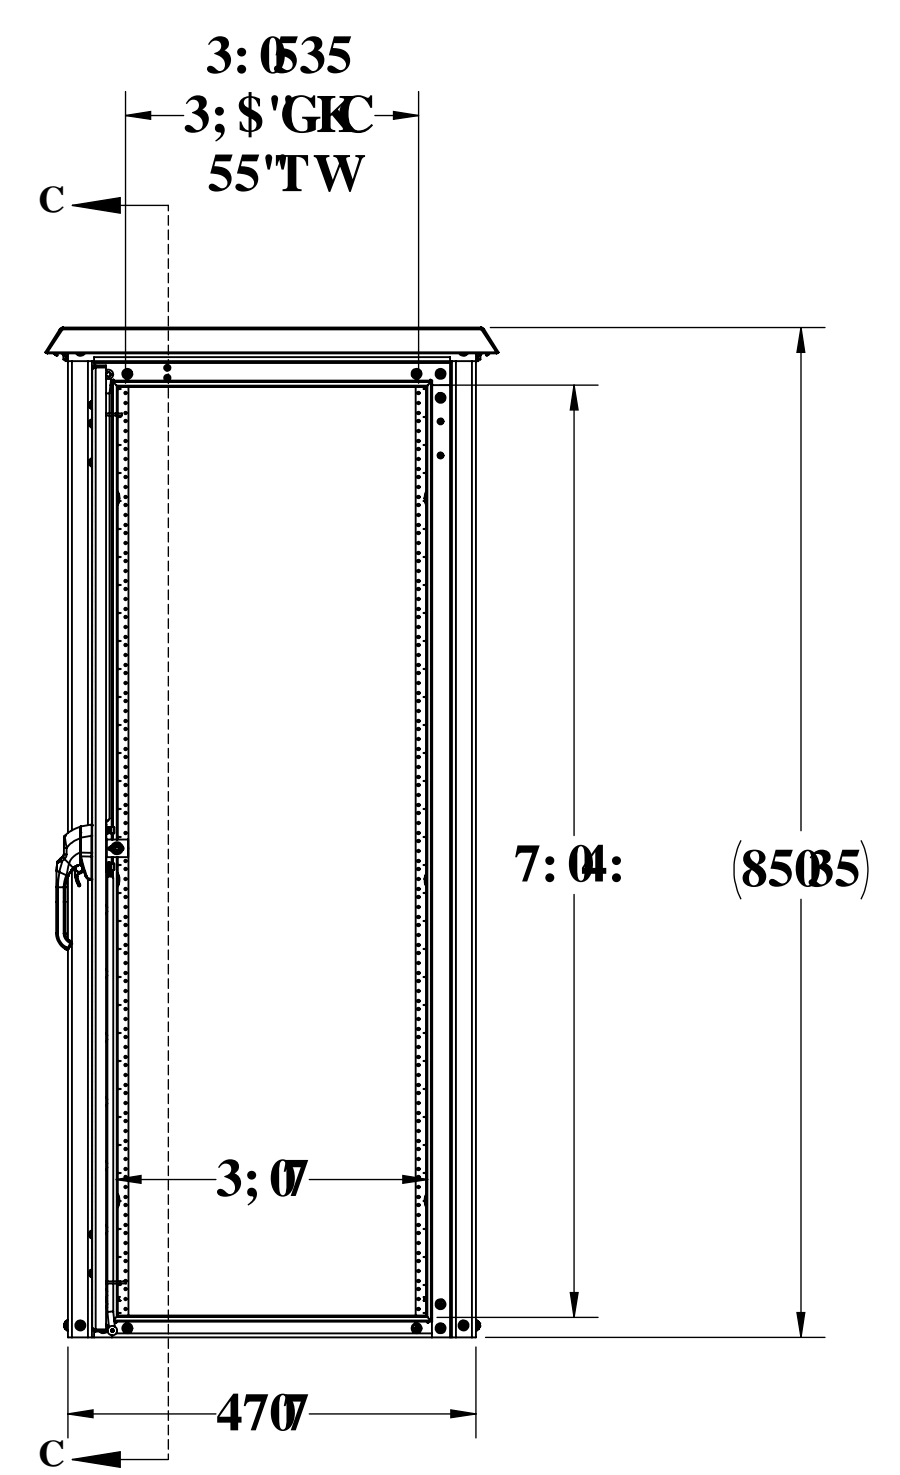


5'RQP V'NQEMPI
GCEJ 'FQQT

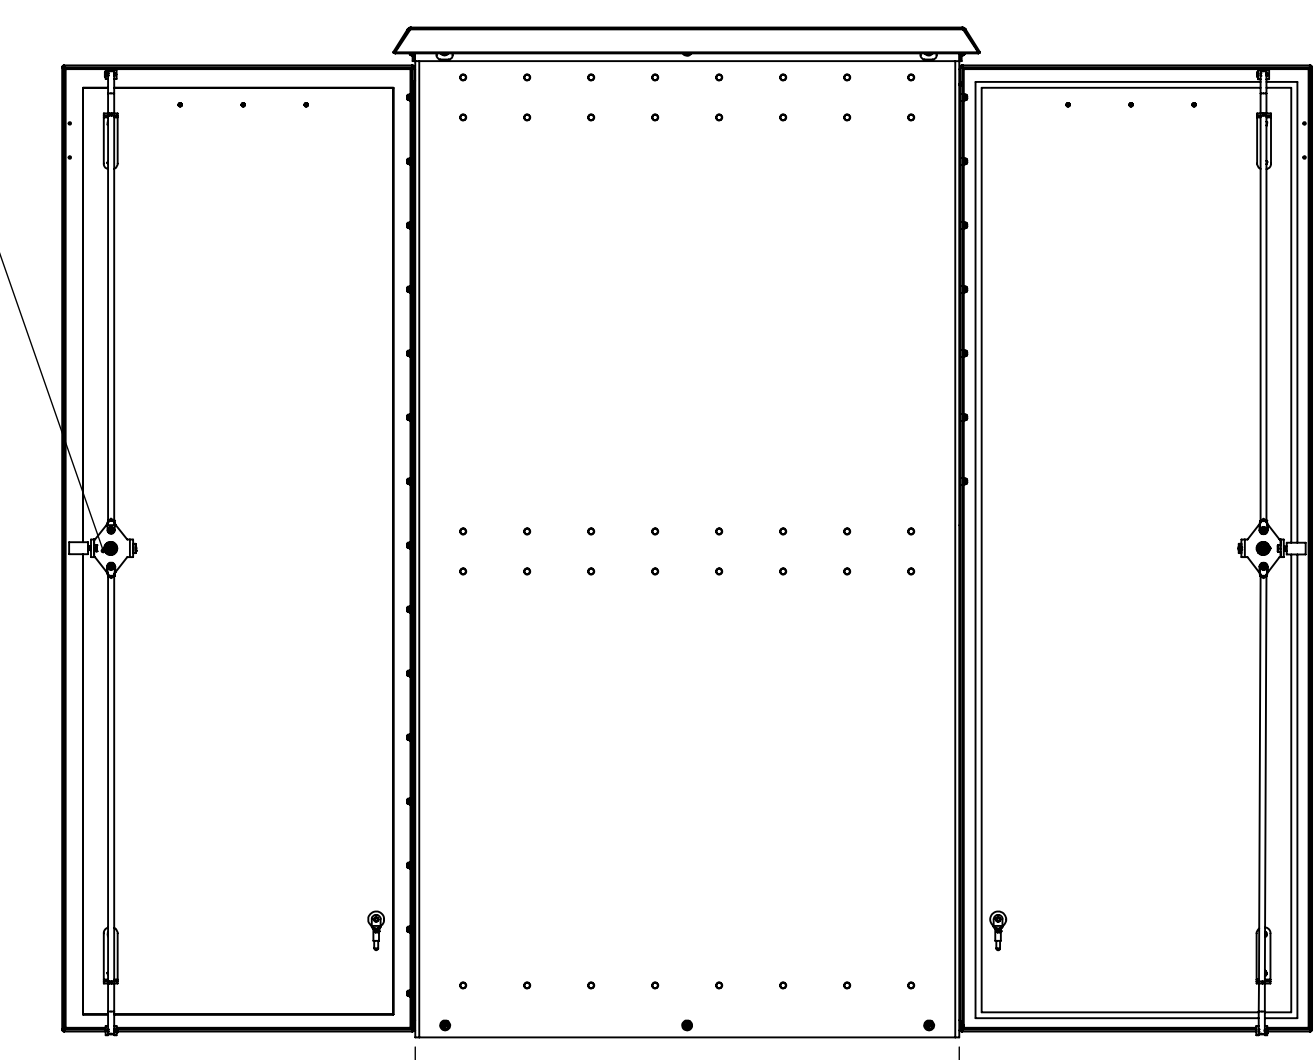

I B'KGCCH'9K-09'077 ± 98.	8861 b'p JYX-bW		
BA'WOCBOSPV e-07-00	CB1* 88811 @ S		
SB: 1.8F	GNP	7U[Y 7cXY.	BK; "BC".
757MCSMBC 007 A 5e 1570 S	8	' ,)M	\$%)'
CIQDE'Y007 A 5e : 327A			6
K.C D07'007 A 5e : 3265			
H'P'007'007 A 5e : 320 S			
50R:CGM:153E 10"			
A 5HF-5@) \$ 2' 21 \$ 90 5GA 605-1S(
D5-BH 85ACB7C: 0809: 9: 4008LH P9H' 85			
BC B'CHG7 5@98FSK-B:			

I B7 @CG# -98 DI 6@7

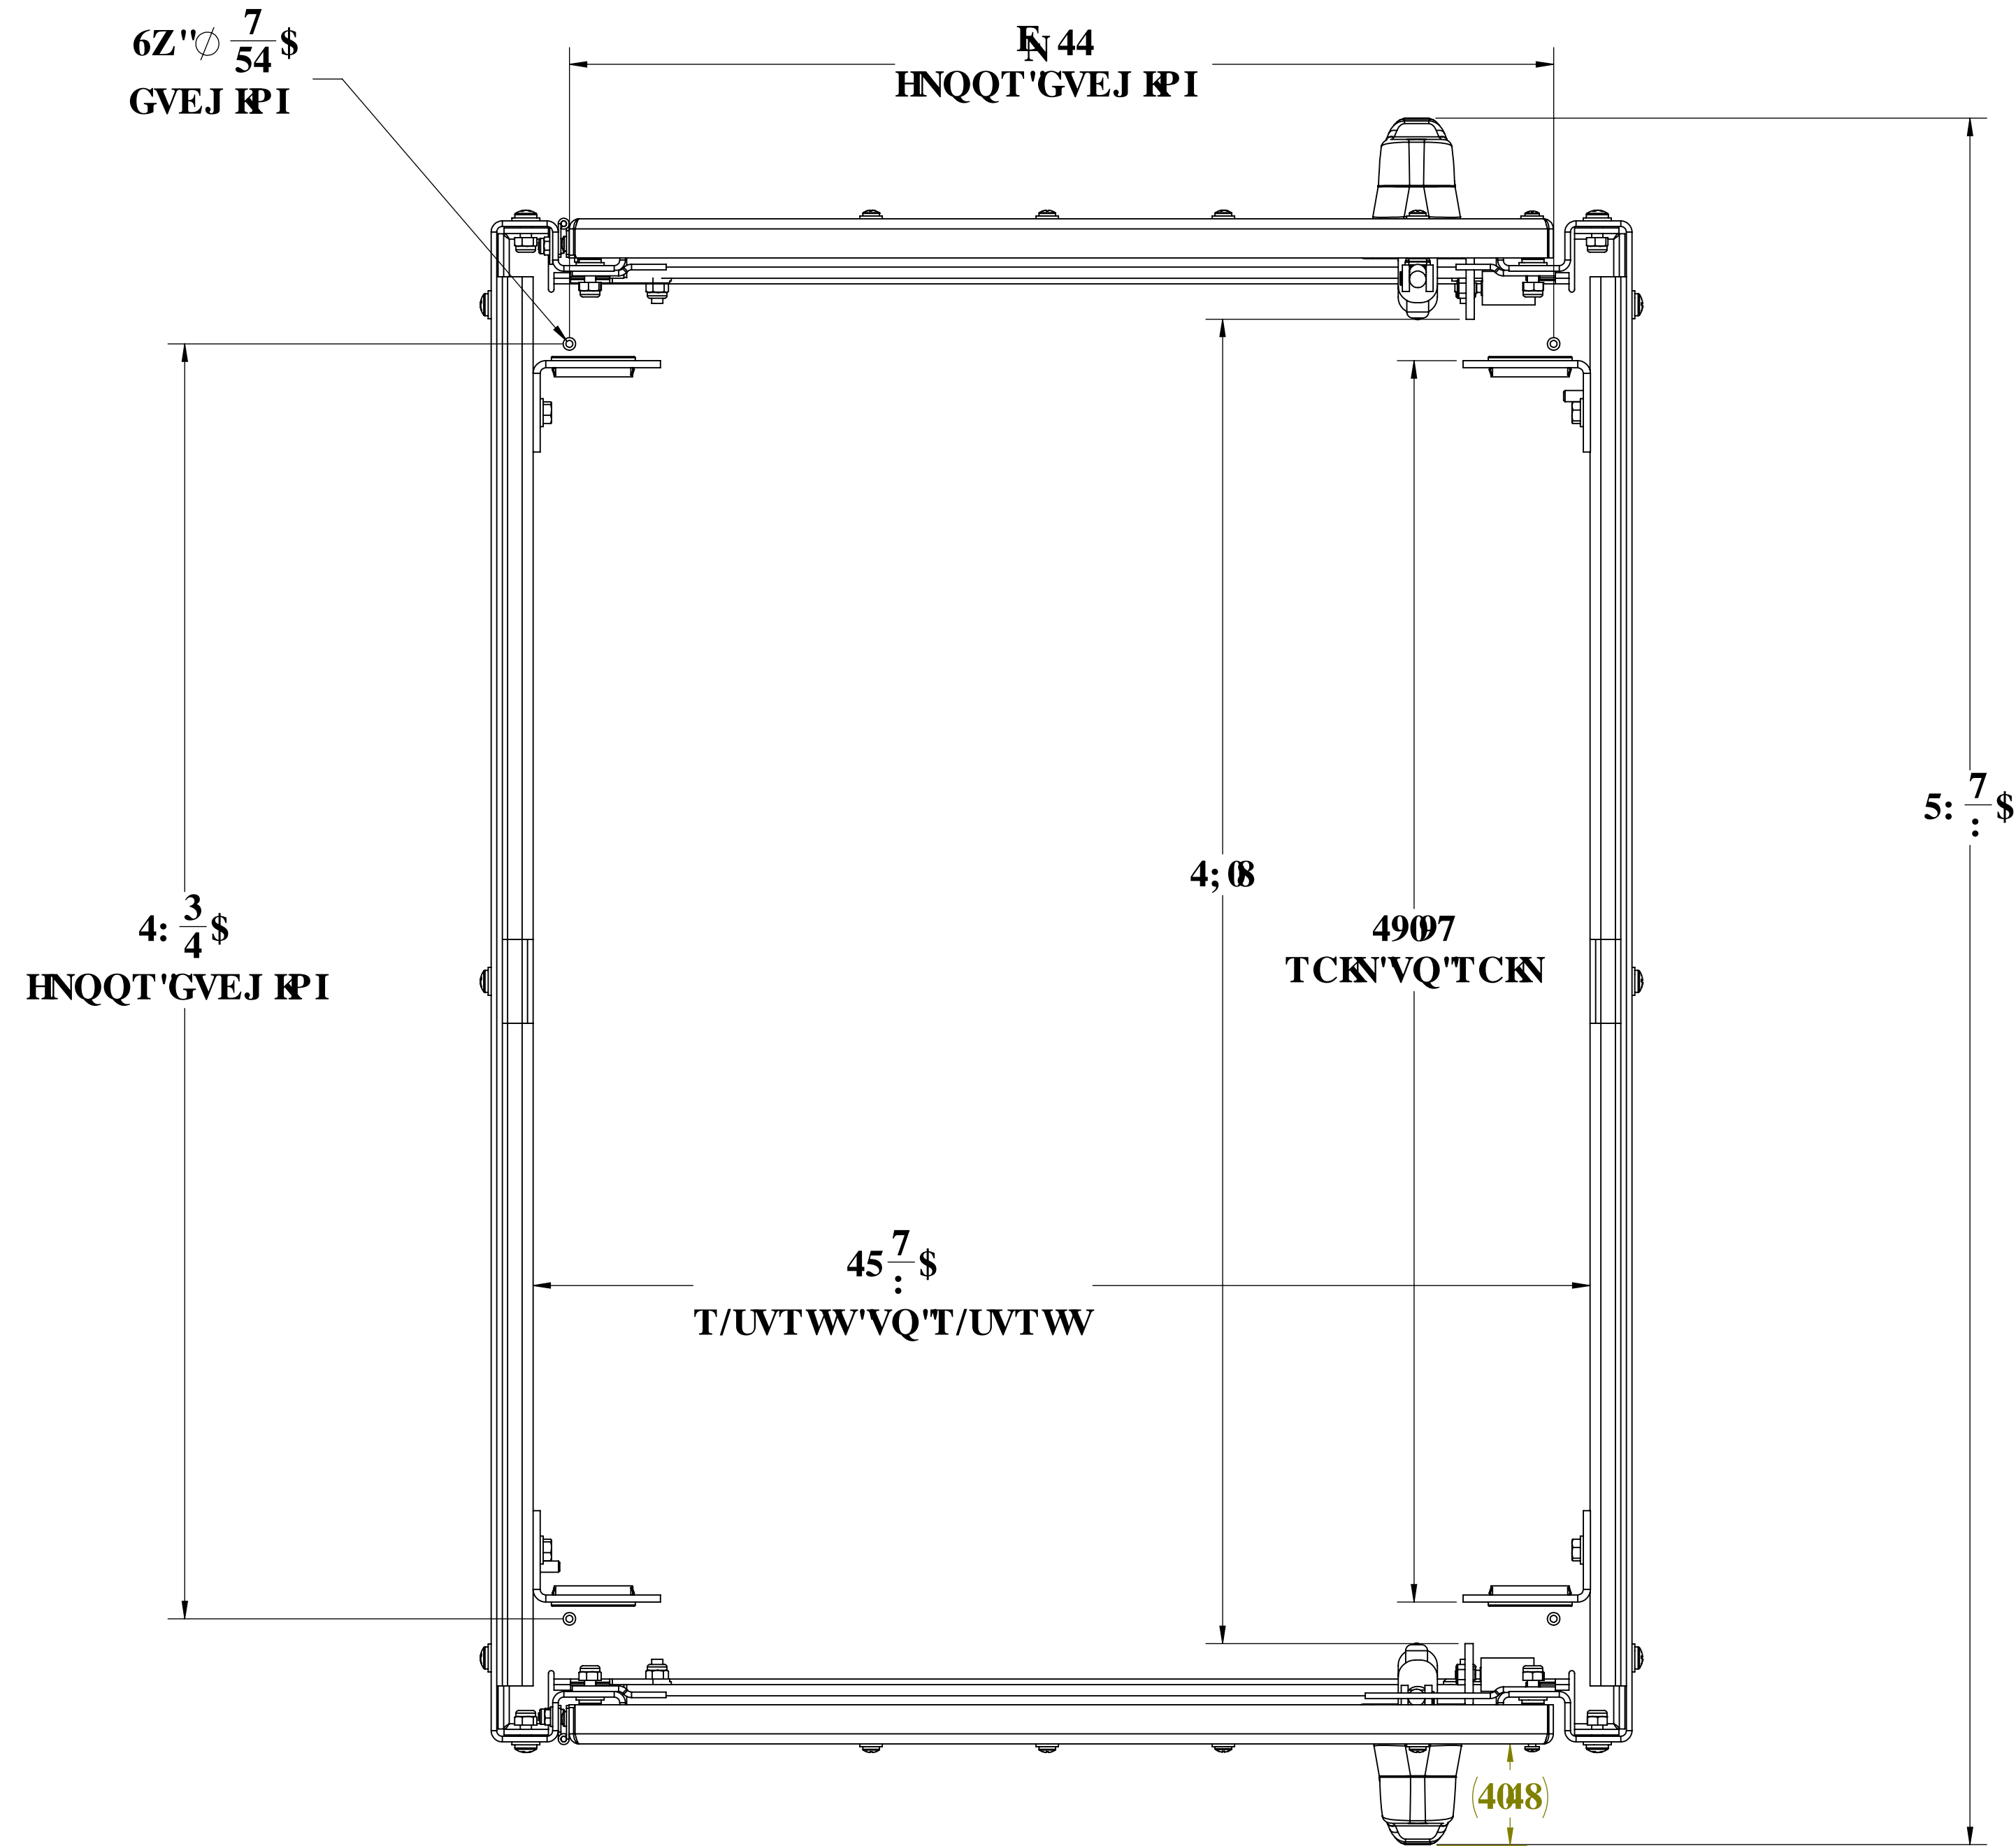


VQR'XIGY 'EGK'PI 'CPF'CNWO CUJ KGNF'PQV'UJ QY P

I B'KCC'CH'9FK 49'07' ± 98.		8861 b'p JYX-bW	
BA'WOC'OS'V'4-07'-00		C818817'cg'X	
SB: 1.8F	757'N'ES'HC'07'A'50' ± 0.005	GNP	7U[Y'7cXY.
CD'OE'7'07'A'50' ± 0.005	K'C'067'07'A'50' ± 0.005	8K:	"'BC".
HD'07'07'A'50' ± 0.005	500'CG'15'50' ± 0.005	F9J	
A 5HF-5@)\$&' ± 0.005	5GA 665-1S(8	'.)M
D6-BH 85ACB'J'C' 08'00' ± 0.005	BC B'CH'G'5@98F5K-B:		\$%)'
		G7 5@%	K 9: <H%' Vg'

I B7 @GG± -98'DI 6@7

FQQT'I CUMGV'J K'FGP

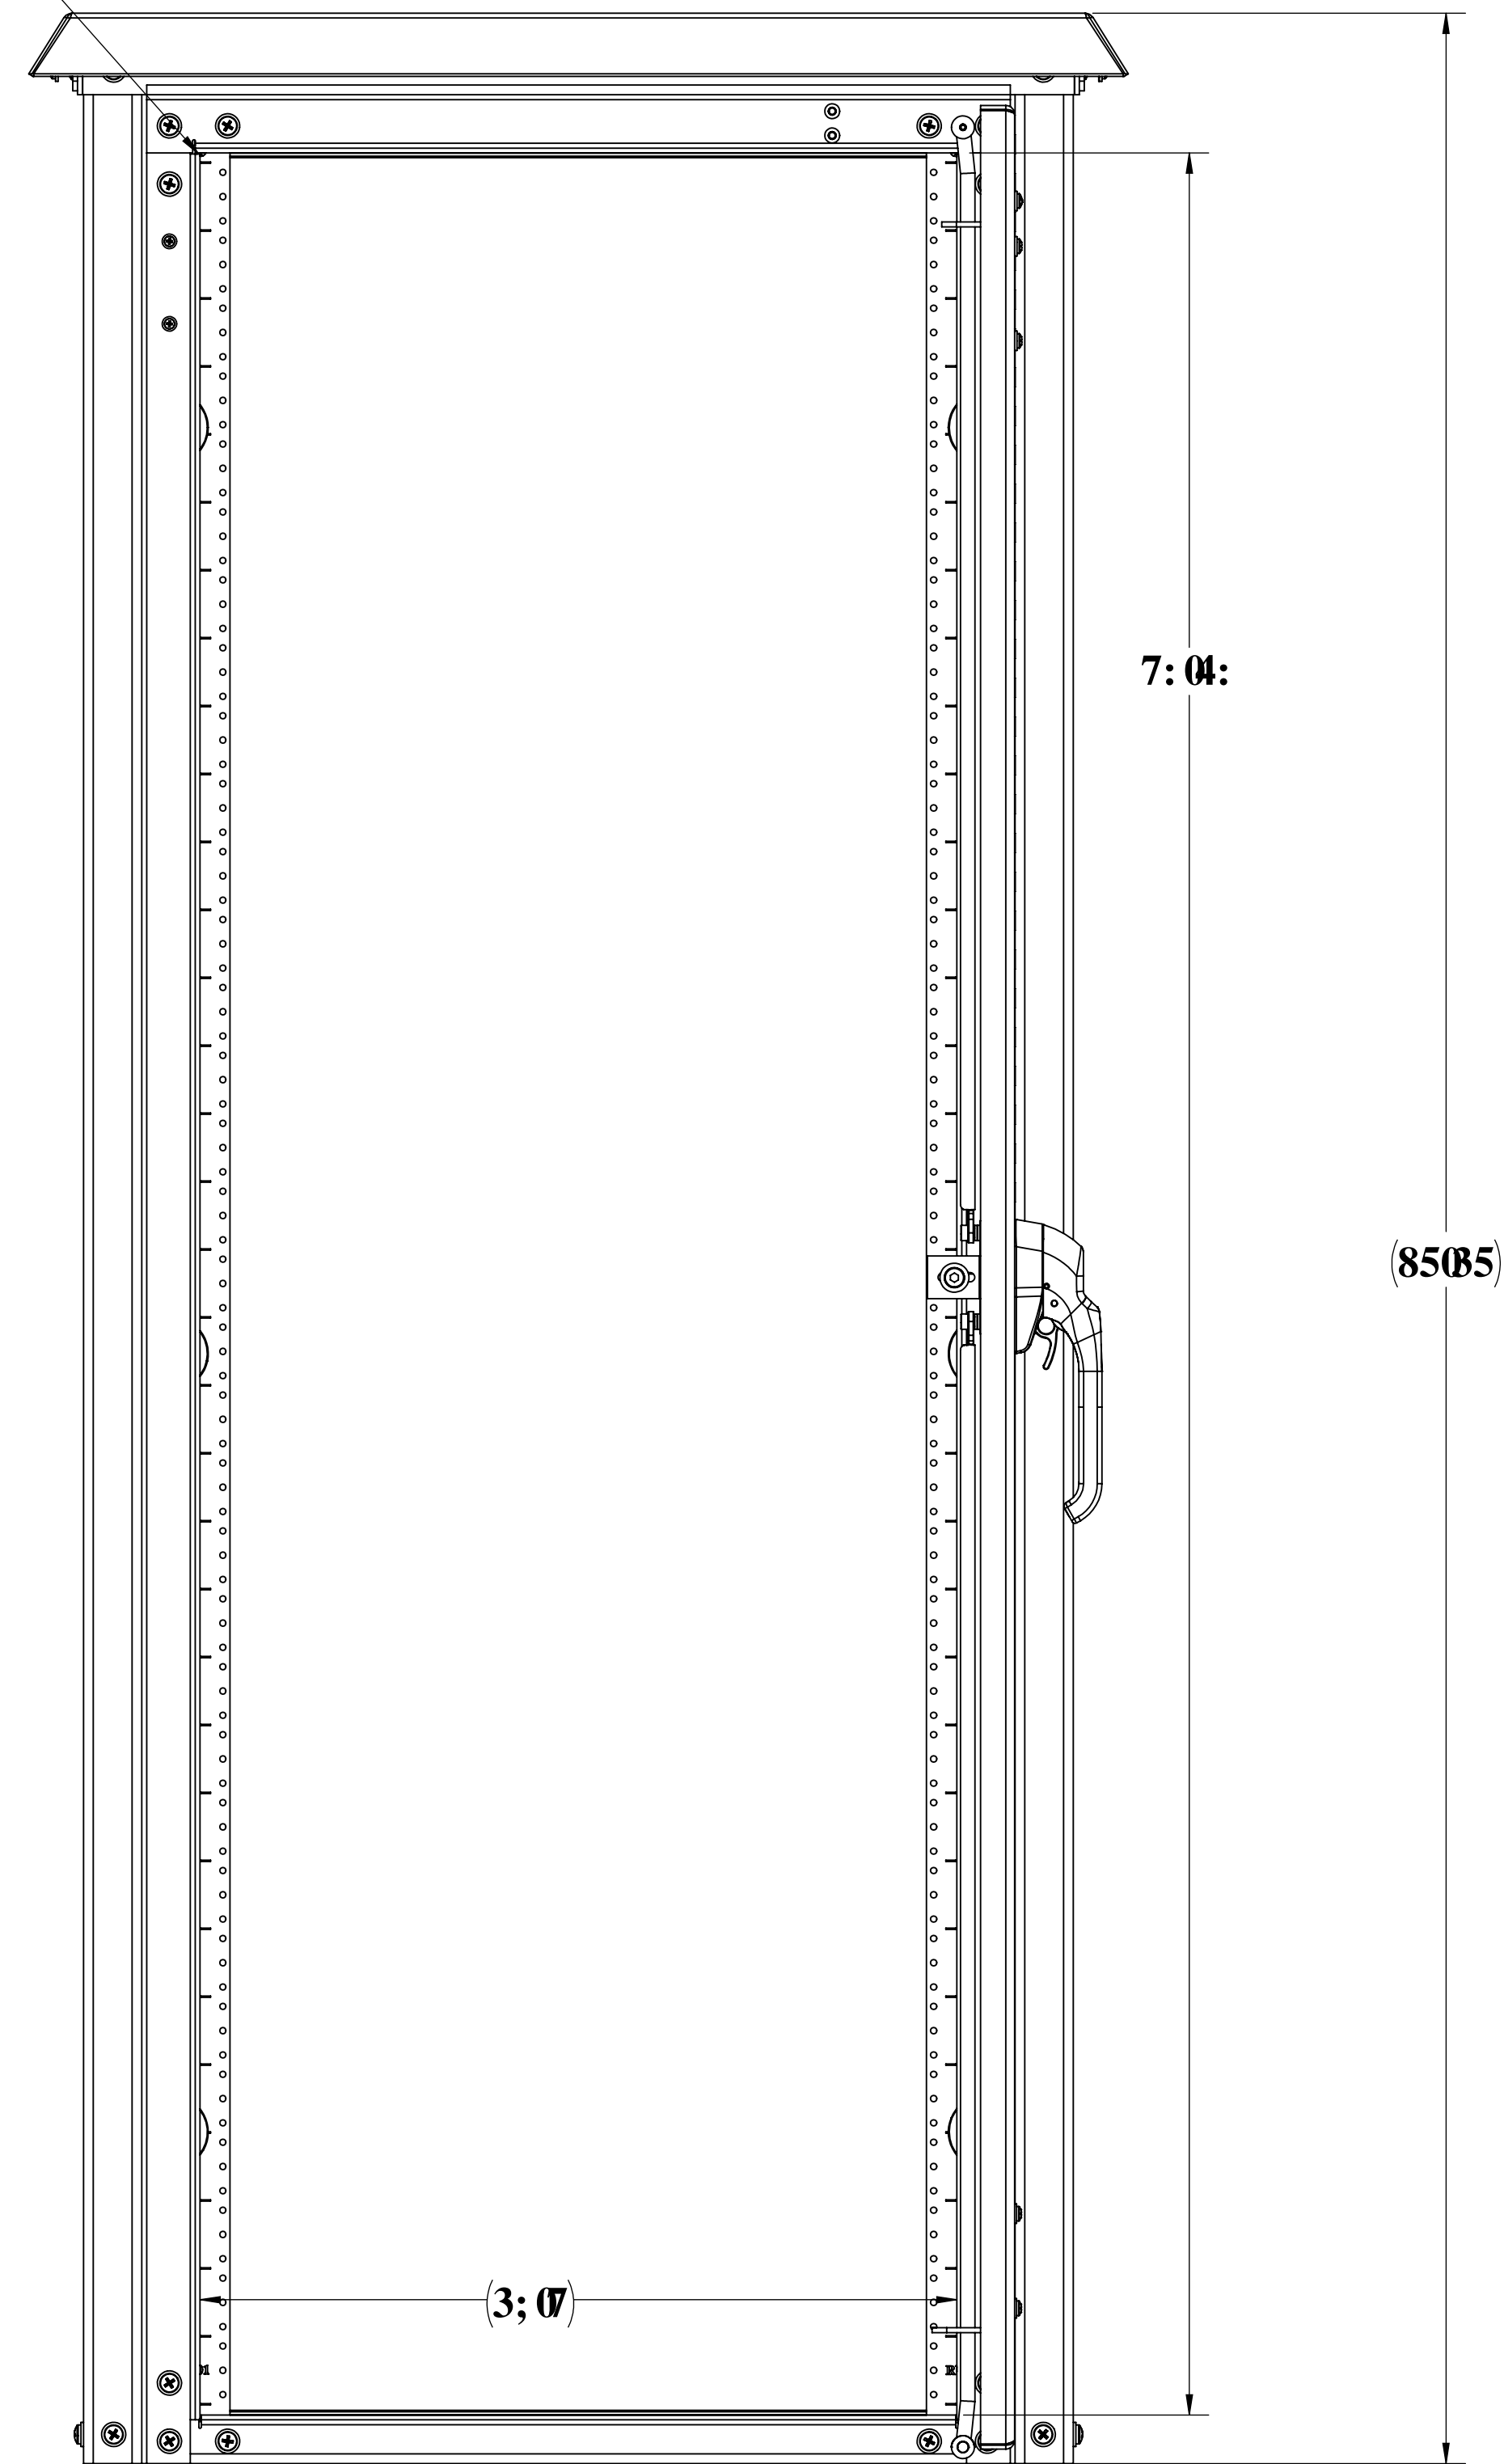

DCEMXKGY

I B7 @5GG# -98'DI 6@7

I B7@5GG# -98'DI 6@7		8861 b'a JYX-bW	
BA 8861 b'a JYX-bW		CB1*88811 @ \$	
GNP	7U[Y7cXY.	BK; "BC"	F9J
8	' ,)M	\$%)'	6
BC B75@98F5K-B		G75@%K 9# <H% , Vg'	