

# UL-50 OD SERIES

## OD-62DDXC-UL50

## Why Choose the OD-UL Series?

The OD-62DDXC-UL50 enclosures are the ultimate choice for your outdoor racking requirements. Being made of our own rugged Alumiflex®, you'll find it noticeably lighter than steel, yet strong enough to rack even the heaviest equipment. When choosing the OD-UL series, you have handpicked the highest value in American construction. The OD-UL series includes the standard features you have come to expect with DDB, incorporating the versatile R-strut system for adjustable racking, the security of a 3-point locking system, our patented Alumishield® solar cap to manage heat loads, door grounding strap, & UL listed gasketing. For those who need more than just our standard enclosure, DDB can also make a truly customized solution with our many available options including HVAC, providing a climate-controlled environment for any electronic equipment, electrical load panels and cable entry solutions to name a few. All of this comes together to create an enclosure able to meet all of the unique needs your customers have been seeking. DDB offers a state-of-the-art design, a competitive price, benchmark lead times and a guaranteed delivery, all backed up with an industry leading 15-year warranty on every enclosure. Put DDB's substantial stock to work for you today. Contact our professional staff to assist you with your made-to-order solution.

## Application Types

- Telecommunications
- Wireless/Broadband
  - Fiber Optics
  - Back Haul
  - Base Station
- Small Cell/ DAS
- Utility
- Public Safety
- Military
- Trailer-Based
- Communications
  - Wi-Fi
- Flexible and Scalable
  - LTEE/4G/5G
- Intelligent Traffic



## Environmental & Safety Ratings:

- ✓ ETL environmentally listed to UL 50/50E, IP 66, Type 4
- ✓ ETL listed; Safety Requirements, UL 62368-1:2019 Ed.3, CSA C22.2



## Features

- 15 Year Warranty
- 0.125" Aluminum Construction
- Welded Construction
- 3-Point Locking System
- Front and Rear Access
- Stainless Steel External Hardware/Hinge
- Custom Colors Available
- Water/Rain/Sleet/Dust Tight
- Flexible and Scalable
- Quick Shipping

## Weight and Dimensions

- Approximate Exterior Enclosure Dimensions:
  - 64"H x 29"W x 47"D
- Shipping Dimensions:
  - 52"L x 32"W x 72"H- Palletized
- Approximate Shipping Weight:
  - 241 lbs.

# UL-50 OD SERIES

## OD-62DDXC-UL50



### Features

1. Alumishield Solar Cap
2. 19" Adjustable Racking Rails
3. Stainless Steel Door Hinge
4. Door Grounding Strap
5. 3-Point Locking System
6. 0.125" Aluminum Construction
7. Rear Door Access
8. Powder Coat Finish

2301 S. HWY 77 Pauls Valley, OK 73075


T: (405)-665-2876

[sales@ddbunlimited.com](mailto:sales@ddbunlimited.com) [www.ddbunlimited.com](http://www.ddbunlimited.com)


Scan this code for  
Climate Control



Scan this code for  
Accessories





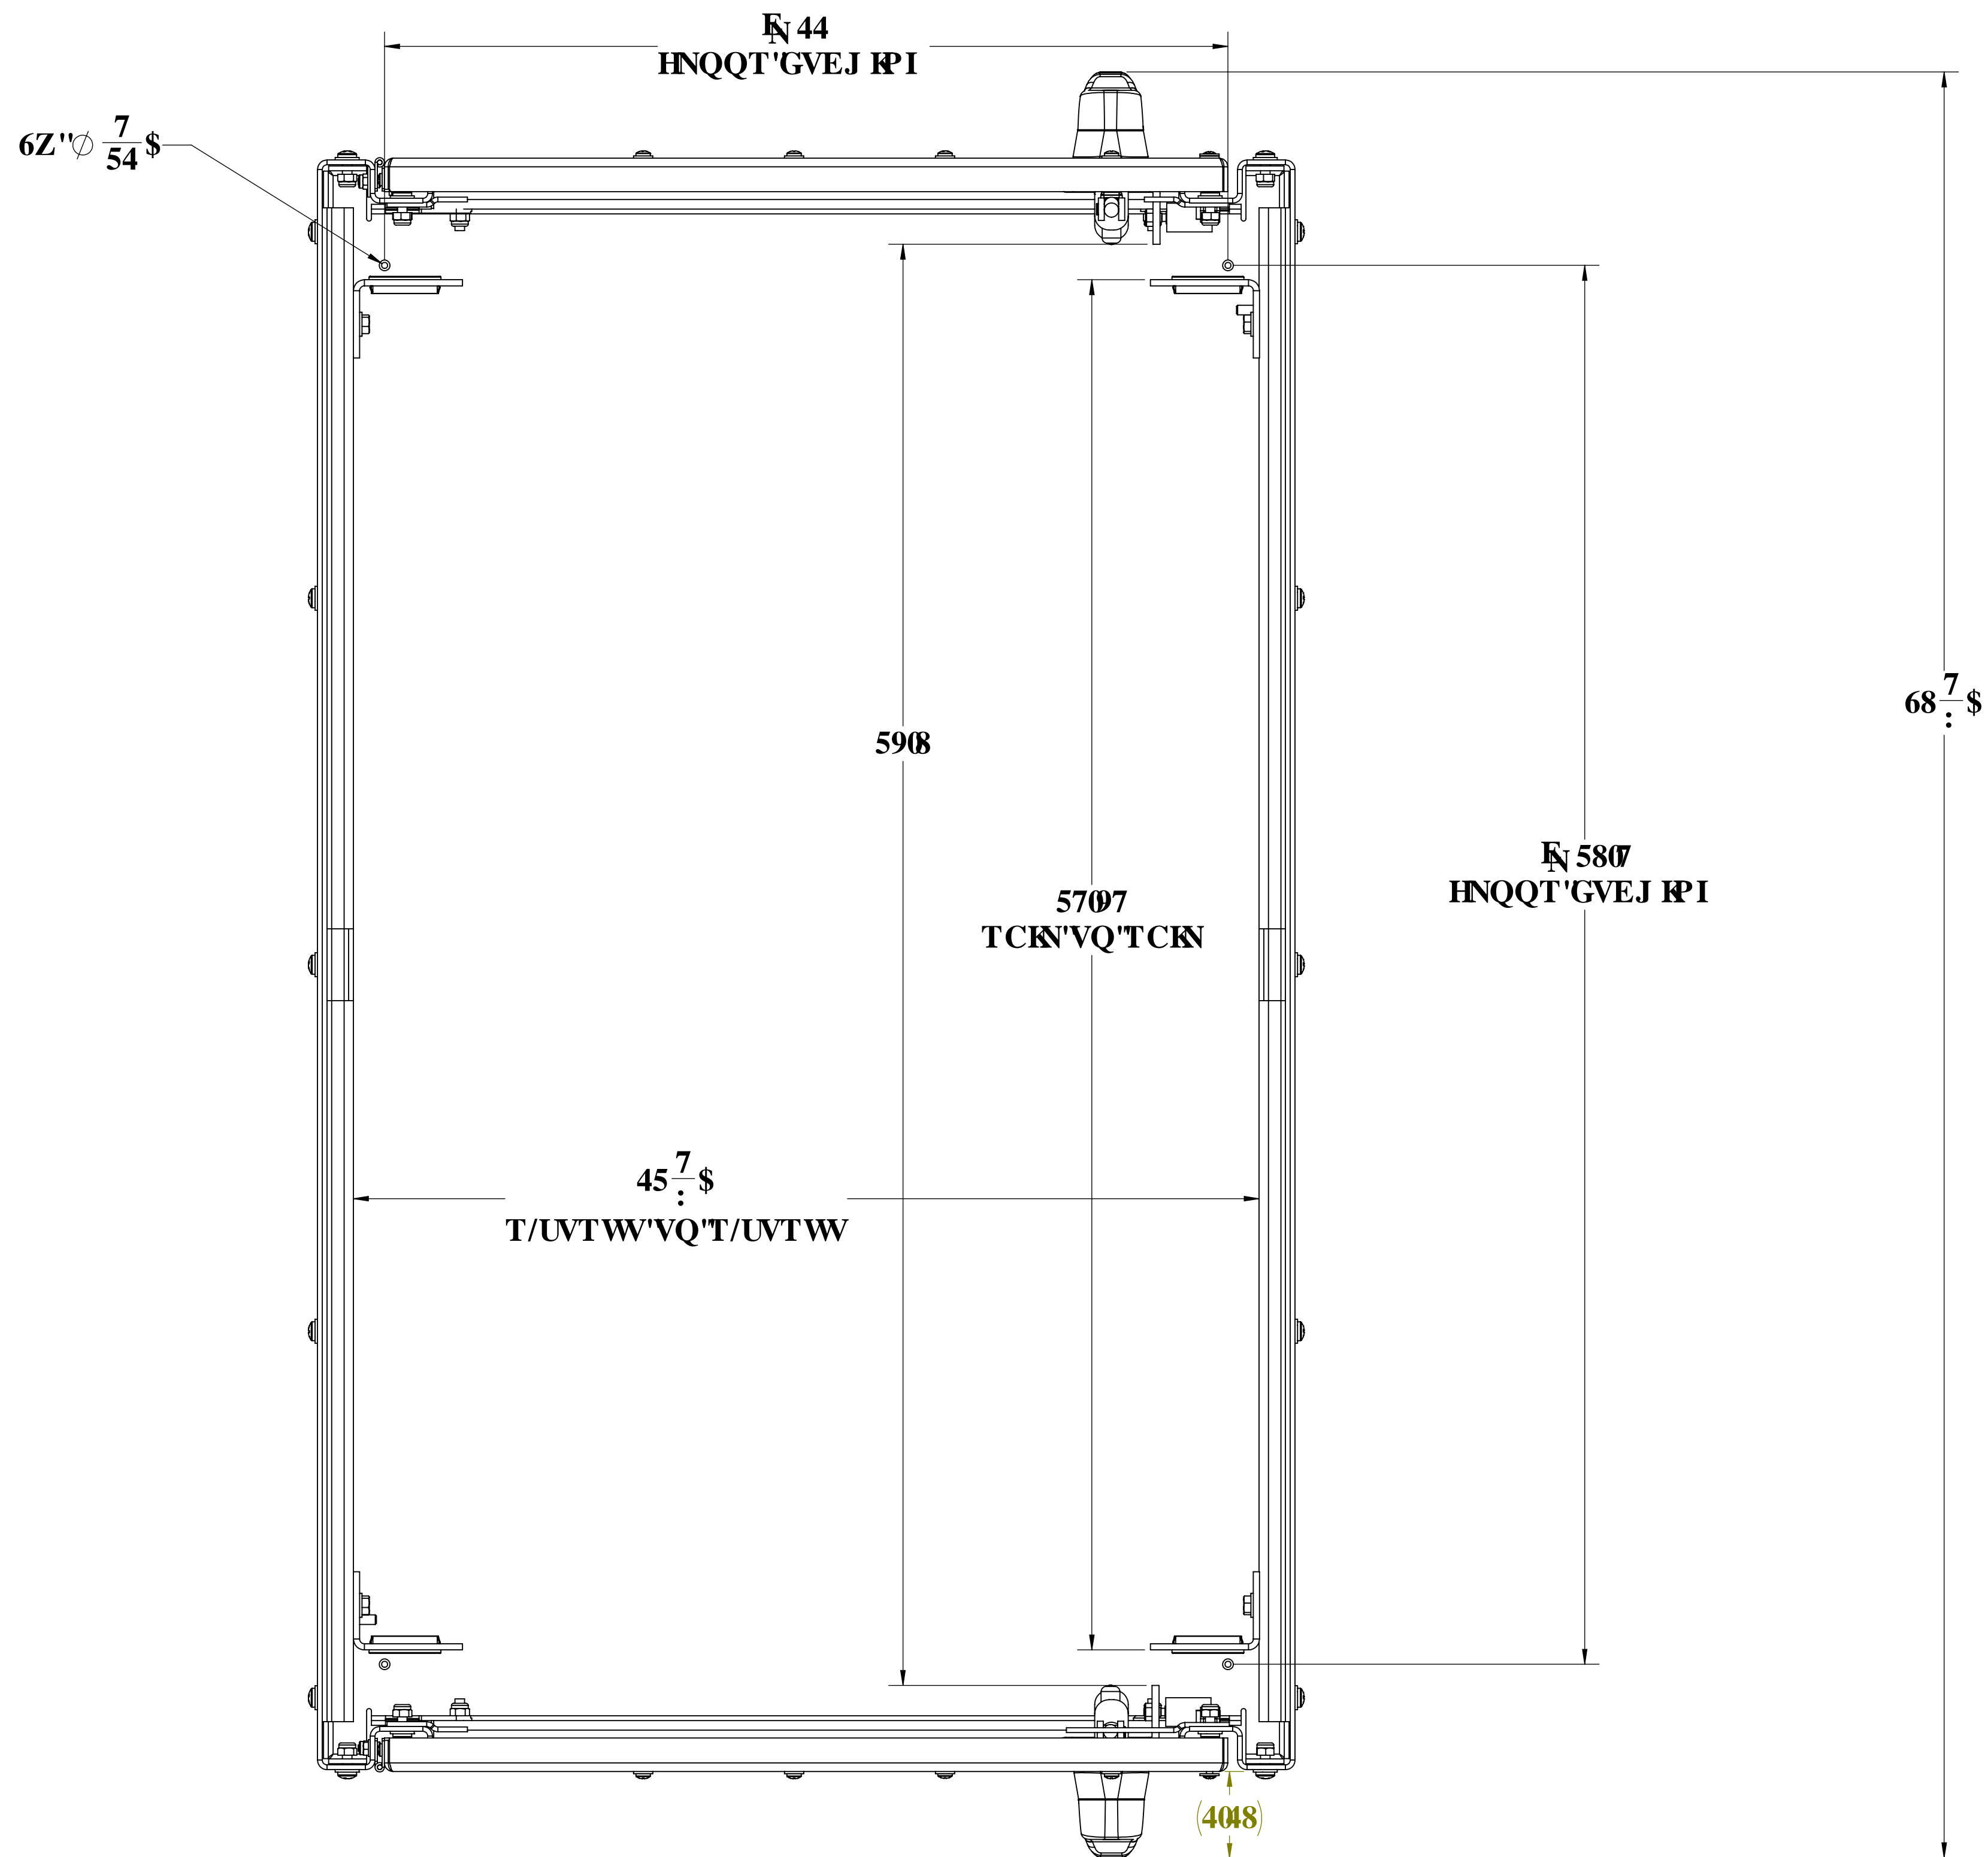


VQR'XIGY 'EGNRPI 'CPF 'CNWO CUJ IGFN'PQV'U QY P

I B'KCC'CH'9K 49'077 ± 98.		8861 b'p JYX' bW	
BA'WOCBOSV'e-07'00		C8188L17'cg'X	
SB : 1.8F	757'NCS'HC'07' A 50 : 1'00	GNP	7U[Y 7cXY. BK : "BC". F9J
CD'02E'7'07' A 50 : 1'00	K C D67'07' A 50 : 1'00	8	' , ) M \$% ) ( 6
H'P'02E'7'07' A 50 : 1'00	500'C'02E'7'07' A 50 : 1'00	G7 50% '%% K 9% <H'25' Vg' G-99'4C : "	
A 5HF-5@ ) \$2' < 21\$%0 5GA 605-1S(			
D6-BH 85ACB'J.C. 08'02' 9' 40'02'07'07' A 50 : 1'00			
BC B'CHG7 5@98F5K 'B:			

I B7 @CG± 98' DI 6@7

FQQT'I CUMGV'J RFFGP

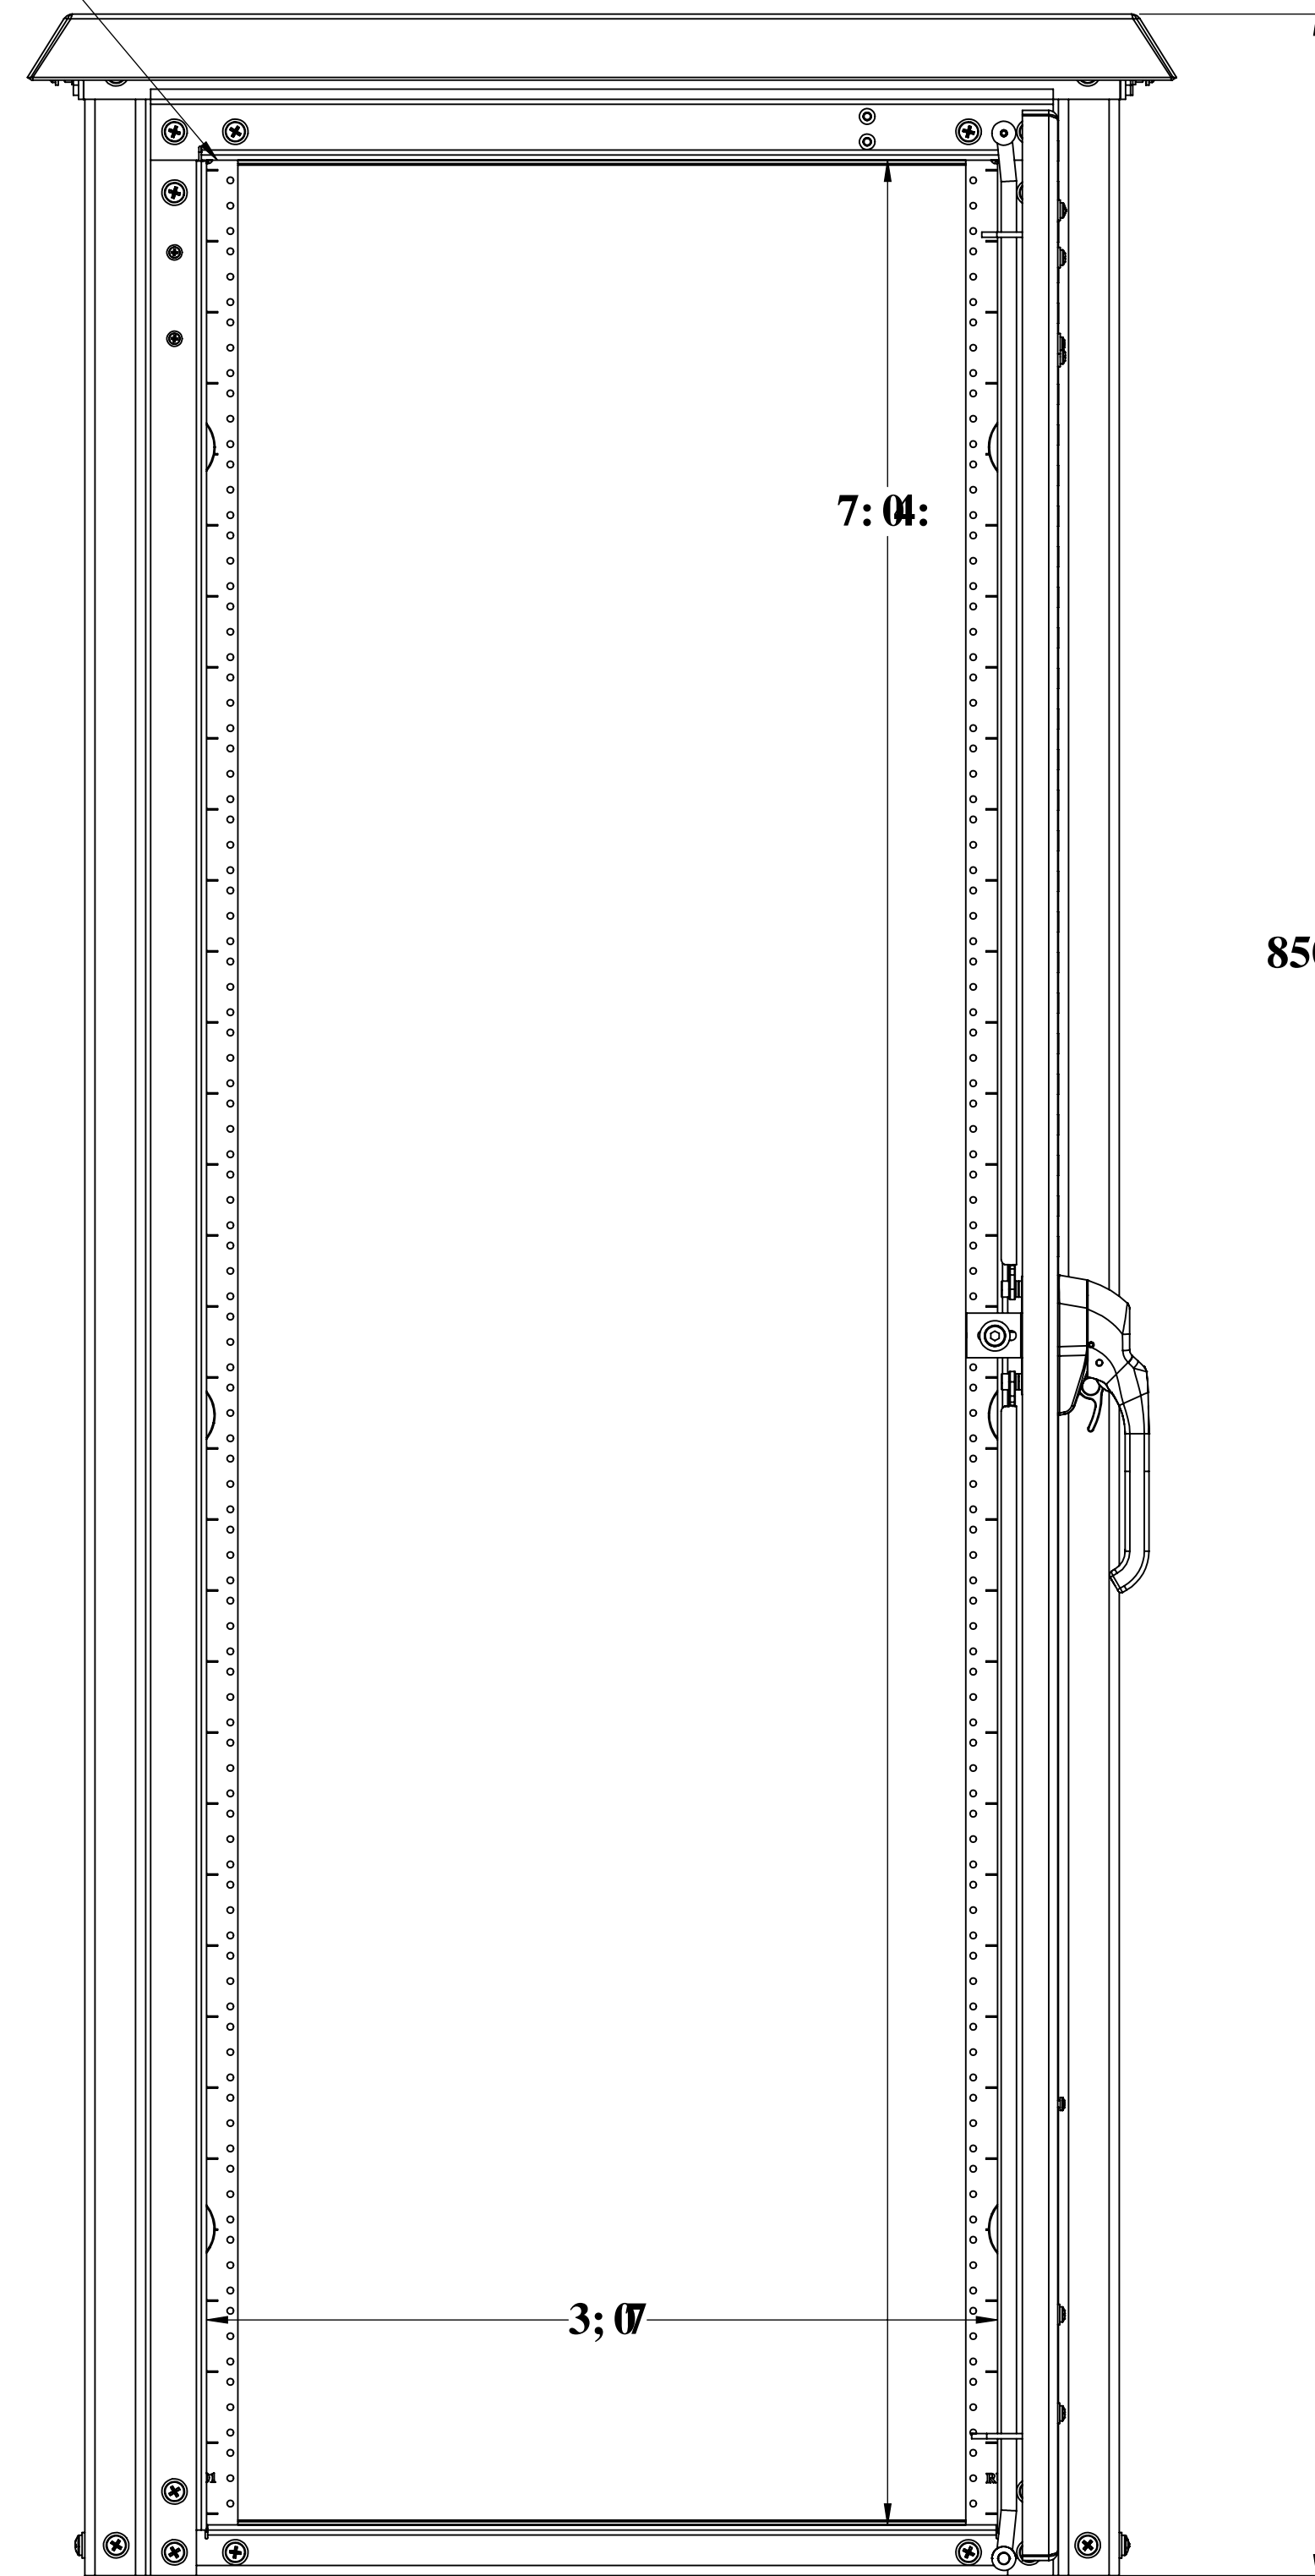

8505

7:04

3:07

TGCT'XIGY

I B7 @GG# -98'DI 6@7

I B7@GG# -98'DI 6@7		8861 b'p JYX-bW	
BA WOCBOSPVe-07-00		C81*88LII @S	
SD: LBF:	757MESHMC 007 A 50	GNP	7U[Y7cXY.
CDPBE7007 A 50	1 3300 S	8	'.)M
K C D67 009 A 50	1 3300 S	BK: "BC"	
H F P D67 009 A 50	1 3300 S	F9J	
50M:CGE:55E 10"		G7 5@:%%K 9# <H% \$'Vg'	
A 5HF-5@ )\$&L'&S\$% 5GA 66S-1S(		G-99H C: "	
D6-BH 86ACB7C: 0800 9' 4008LH F9H' 85			
BC BCHG7 5@98F5K-B:			

7.P886P8F FYei YgtP7I gta YfgP886K 968K : PC 8 : Ua ]nI @ \$K 96PC81\*88LII @ \$K 96P

:Y @:W]k:b. 1B864fD8A JUI ht